



Virtual Host

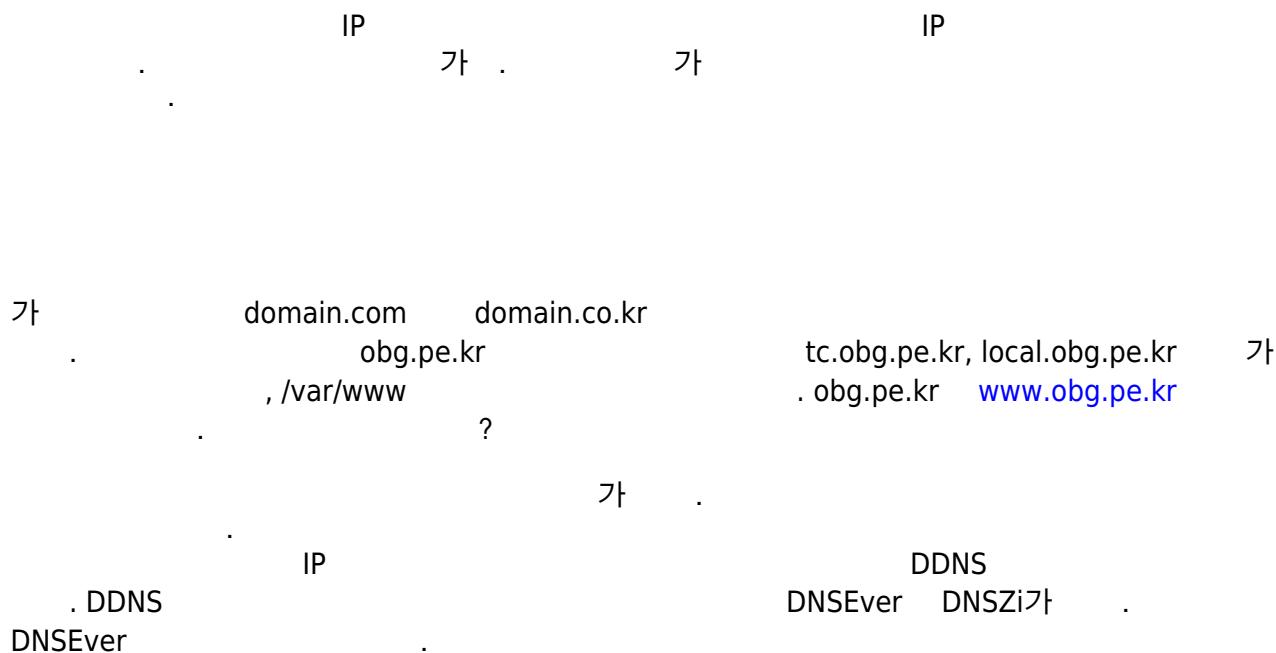

DNSEver

DNSEver(<http://kr.dnsever.com>)

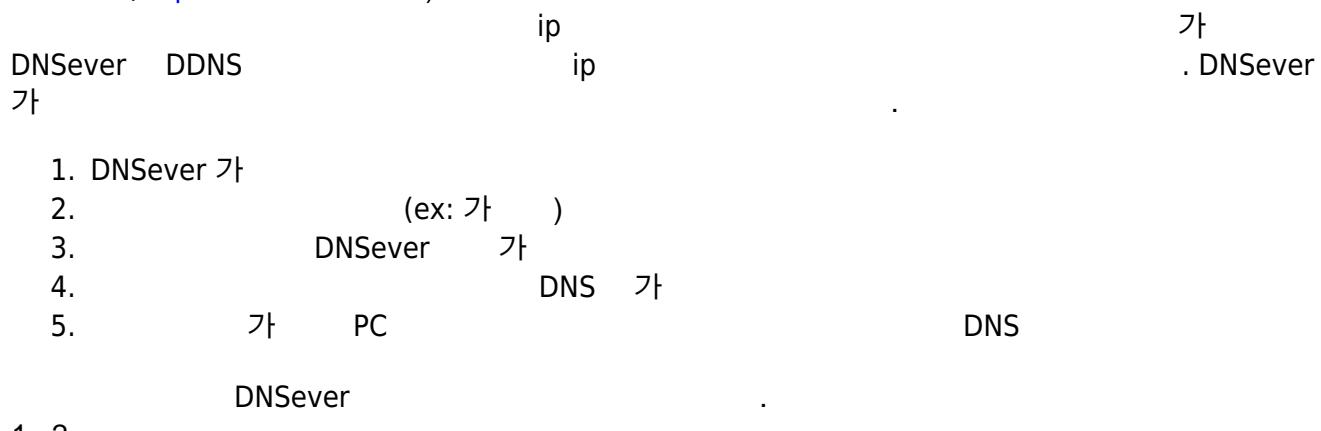

Virtual Host

1. /etc/apache2/apache2.conf
Servername "obg.pe.kr"
 2. /etc/apache2/sites-available() . (ex: obg.pe.kr)
 3. obg.pe.kr

```
<VirtualHost *:80>
```

```
ServerAdmin vfinger@naver.com
ServerName obg.pe.kr
ServerAlias www.obg.pe.kr
DocumentRoot /var/www/xe
</VirtualHost>

<VirtualHost *:80>
ServerAdmin vfinger@naver.com
ServerName local.obg.pe.kr
DocumentRoot /var/www
</VirtualHost>

<VirtualHost *:80>
ServerAdmin vfinger@naver.com
ServerName tc.obg.pe.kr
DocumentRoot /var/www/tc
    <Directory /var/www/tc>
        Options FollowSymLinks
        AllowOverride All
    </Directory>
</VirtualHost>
```

4. \$ sudo a2ensite obg.pe.kr

5. `$ service apache2 restart` (`$ service apache2 reload`)

```
www.obg.pe.kr, local.obg.pe.kr, tc.obg.pe.kr
obg.pe.kr
    . default           DocumentRoot  /var/www/xe
    . (    default    a2dissite    )
```

• 가

From: <http://www.obg.co.kr/doku/> - **OBG WiKi**

Permanent link:
http://www.obg.co.kr/doku/doku.php?id=linux:virtual_host

Last update: **2020/11/29 14:09**

